


2023-04-12

IMPORTANT! Following preparation MUST BE DONE BEFORE THE CAR ENTERS TO SCRUTINEERING! If not done, car will be rejected to enter the scrutineering!

Example of Turbo sealing wire install (applies to J2 GrpN and GrpA turbo cars, also spare turbo). Every main part (restrictor, housing and exhaust housing) must have two attachment points where the wire is installed (wire through two bolts OR bolt and housing OR two housing). Wire must be single piece and wrapped between every attachment point.

See Appendix K Appendix XI item 2.1.3

5/ SEALING OF THE TURBOCOMPRESSOR

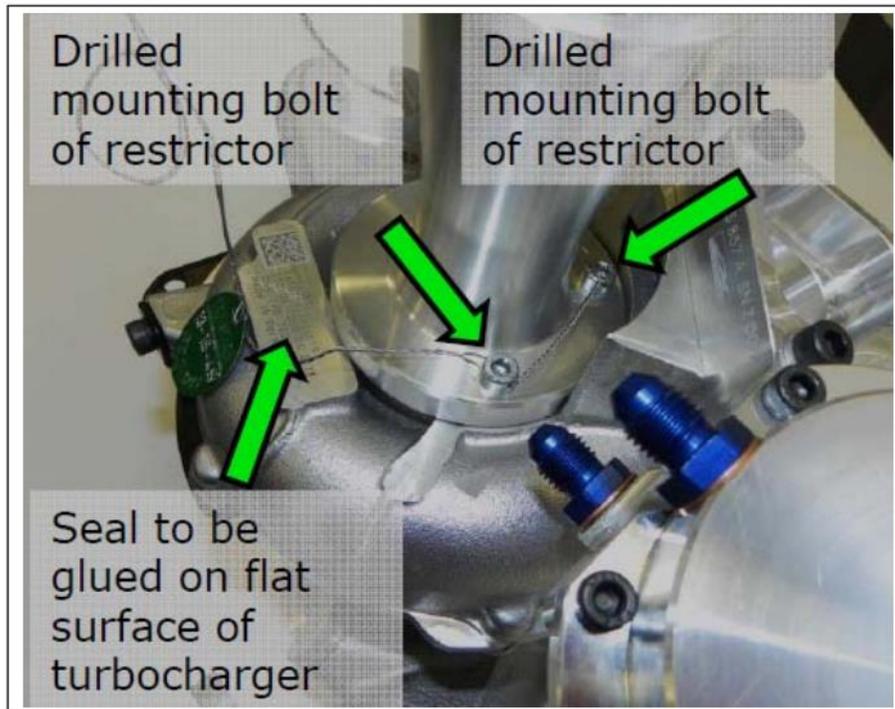


Example how to route the wire through two restrictor mounting bolts.

Seal tag number shall be visible from upwards



Example how to route wire through housing and exhaust (base part + mounting bolt)

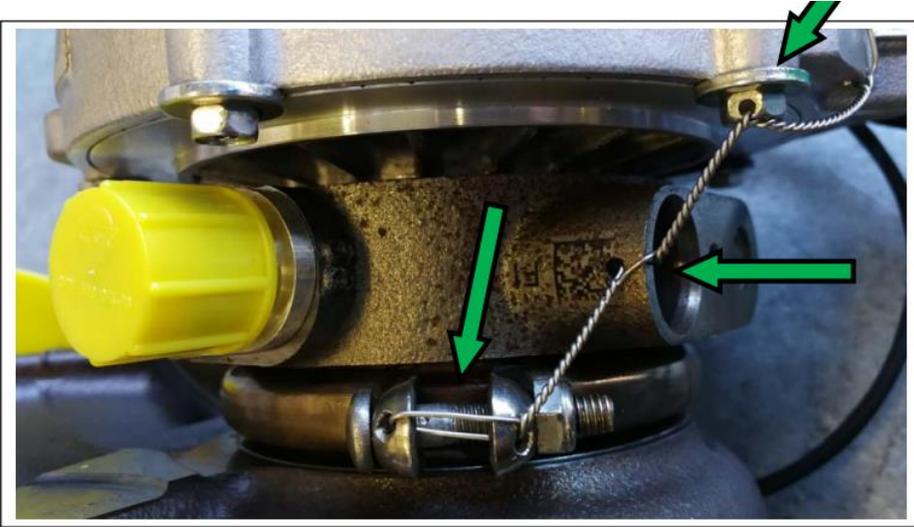

Example how to route the wire for exhaust side (housing + mounting clamp)

Note, that after last wire mounting place there shall be free wire ends (min 150mm long) to make it possible to wrap first 20mm and then add seal+tag+seal, having 20mm between each.